

Stabilization of Descriptor Systems Via Proportional Plus Derivative State Feedback

Rim ZAGHDOUD, Salah SALHI, and Moufida KSOURI

Laboratory of Analysis and Control Systems (ACS), National Engineering School of Tunis (ENIT),
University EL Manar, BP-37, le Belvedere, 1002 Tunis, Tunisia
rim.zaghoud@yahoo.fr, salhis@lycos.com, moufida.ksouri@enit.mu.tn

Abstract—this paper presents a method to design proportional plus derivative (PD) state feedback controllers for descriptor linear systems. The proposed approach guarantees the stability of closed-loop system. The existence of such a controller is determined by developing a necessary and sufficient condition in terms of LMIs. Then, the desired PD state feedback controller is given in the explicit expression. The proposed approaches' applicability is illustrated by an example of simulation.

Keywords—descriptor linear systems; proportional plus derivative state feedback; linear matrix inequality.

I. INTRODUCTION

The Singular systems, also called descriptor system, implicate systems or algebra differential systems present an important class of systems with a great practical and theoretical interest. This class was firstly used for the modelization of a large range of systems that can not be modelized by the usual state representation. Indeed, descriptor systems show both dynamic relations and algebraic ones. This augmentation allows adding static relations in the modelization of process that have an impulsive behavior or also non causal process. Besides, descriptor systems keep the systems physical significations [1]. [1,2] Singular systems are used in electric, chemical and robotic fields. Since 1970, many researches were concentrated on descriptor systems. A several number of fundamental results obtained for ordinary systems, have been extended for singular systems such that: observability, controllability stability, elimination of impulse behavior, pole assignment, [2,3,4,5]. A great interest in the area of stability, stabilization techniques and robustness for descriptor systems has been noted. Interested readers may refer to [6], where a comparison between, the concept of Lyapunov functions and the theory of differential inequalities is established for singular system. In the work of [7], a problem of regularization by state and output predictive controllers is treated firstly. Then a stabilization procedure of the regularized system is given and a computation of controller gains through linear matrix

inequalities is developed. In [8], a proposed approach based on GLE is adopted under a set of matrix inequality for the admissibility of discrete singular systems. This last property includes the stability as well as the impulse freeness and the regularity. Other works have been interested in the robust stabilization [9, 10]. [11] has developed the robust stability of singular delayed systems by introducing the concept of generalized quadratic stability. A strict LMI design approach is proposed and an explicit expression for robust state feedback control law is given. Moreover, in [12], the robust stabilization problem is solved through state feedback controller where the parameters uncertainties appearing in both the state and input matrices and the concepts of generalized quadratic stability and stabilizability are introduced. . In [13], to reduce the conservatism of the stabilization quadratic, a PDL approach is used to solve the robust static output-feedback admissibility problem, for the descriptor systems case. The aim of this work is to study a proportional plus derivative (PD) state feedback controller for a nominal continuous descriptor system, satisfying the closed-loop systems stability. Based on this result, a necessary and sufficient condition for the solvability of this problem is obtained in terms of linear matrix inequality LMIs.

This present study has a different aspect from those were developed in literature for singular systems stabilization. The different consists on the controller structure, since it is the first work that dealing with the PD regulator case and on the stabilization technique. This latter exploits the stabilization concept for the standard usual systems. The point is to determine a PD controller that translating the study from a descriptor system to a standard one. Then, we look for a necessary and sufficient condition under a LMI formalism with guarantying the system stabilization. The paper is organized as following: The second section formulates the problem to be addressed in the paper. Some necessary and sufficient conditions for stabilization of descriptor linear systems via state plus state derivative feedback are presented in section three. An illustrative example is worked in section four. The last section gives some concluding remarks.

Notations: Throughout this paper, the following notations will be used. For two matrices A and B, $A > B$ means that A-

B is positive definite. A^T denotes the transpose of A and A^{-T} the transpose of the inverse of A. Identity and null matrices will be denoted respectively by I and 0.

Furthermore, in the case of portioned symmetric matrices, the symbol * denotes generally each of its symmetric blocks and $A + \text{sym}(*)$ denotes $A + A^T$.

II. PRELIMINARIES

Let's consider the following continuous-time linear descriptor system described by:

$$\dot{E}x(t) = Ax(t) + Bu(t) \quad (1)$$

Where $x(t) \in \mathbb{R}^n$, $u(t) \in \mathbb{R}^m$ and $y(t) \in \mathbb{R}^r$ are its state, control input vector, and measurement output respectively.

$E, A \in \mathbb{R}^{n \times n}$, $B \in \mathbb{R}^{n \times m}$, and $C \in \mathbb{R}^{r \times n}$ are constant matrices of appropriate dimensions. The matrix E may be singular. It is assumed that $\text{rank}(E) = q \leq n$.

III. STABILIZATION PROBLEM

We consider the state proportional plus derivative control expressed as:

$$u(t) = K_p x(t) - K_d \dot{x}(t) \quad (2)$$

Where $K_p, K_d \in \mathbb{R}^{m \times n}$ are matrixes of appropriate dimensions. The closed loop system is given by:

$$(E + BK_d)\dot{x}(t) = (A + BK_p)x(t) \quad (3)$$

We aim to design a PD state feed-back control of the form (2) such the gain K_p acts on the stability of the system and K_d make the expression (3) well defined. In other words find a gain K_d , which allows us to write the equation (3) as follows:

$$\dot{x}(t) = (E + BK_d)^{-1}(A + BK_p)x(t) \quad (4)$$

Thus, the stabilization study of system (1) becomes a study of usual standard system. Let us introduce the following definition, where the stability is stressed under the Lyapunov sense.

Definition1: System (1) is SD-stabilizable if there exist a matrix K_p and K_d of appropriate dimensions and positive definite symmetric P such that:

$$(E + BK_d)^{-1}(A + BK_p)P + P(A + BK_p)^T(E + BK_d)^{-T} < 0 \quad (5)$$

This definition supposes that system (2) is well defined, i.e that matrix $(E + BK_d)$ is full rank. Consequently matrix $(A + BK_p)$ is also full rank.

A. Stabilization for a Nominal Descriptor System

In this section, a necessary and sufficient condition for the solvability of PD state feedback controller is given in terms of linear matrix inequalities. The theorem below follows directly from the previous definition.

Theorem1: the following statements are equivalent:

i) System (1) is SD-stabilizable.

ii) There exist a positive definite matrix Y and matrices F, R_1 and R_2 of appropriate dimensions such that:

$$\begin{bmatrix} F^T A^T + AF + BR_1 + R_1^T B^T & Y + F^T A^T + R_1^T B^T - EF - BR_2 \\ * & -F^T E^T - EF - BR_2 - R_2^T B^T \end{bmatrix} < 0 \quad (6)$$

The gain given by: $K_p = R_1 F^{-1}$ and $K_d = R_2 F^{-1}$ solves problem.

Proof: by the definition1, the equation (5) is written in the following way ($Q = P^{-1}$), $Q > 0$:

$$(A + BK_p)^{-T} Q (E + BK_d)^{-T} + (E + BK_d)^{-T} Q (A + BK_p)^{-T} < 0$$

This is equivalent to:

$$\begin{bmatrix} A_c^{-T} & E_c^{-T} \end{bmatrix} \begin{bmatrix} 0 & Q \\ Q & 0 \end{bmatrix} \begin{bmatrix} A_c^{-1} \\ E_c^{-1} \end{bmatrix} < 0, \begin{bmatrix} 1 & -1 \end{bmatrix} \begin{bmatrix} 0 & Q \\ Q & 0 \end{bmatrix} \begin{bmatrix} 1 \\ -1 \end{bmatrix} = -2Q < 0$$

$$\text{where } A_c = A + BK_p \text{ and } E_c = E + BK_d$$

By the projection Lemma [3], there exists a matrix G of appropriate dimension such that:

$$\begin{bmatrix} 0 & Q \\ Q & 0 \end{bmatrix} + \begin{bmatrix} (A + BK_p)^T \\ -(E + BK_d)^T \end{bmatrix} G^T [I \ I] + \text{sym}(*)) =$$

$$\begin{bmatrix} (A + BK_p)^T G^T + G(A + BK_p) & (A + BK_p)^T G^T + Q - G(E + BK_d) \\ * & -(E + BK_d)^T G^T - G(E + BK_d) \end{bmatrix} < 0$$

Taking now $F = G^{-T}$, and applying the congruence transformation $\text{diag}(G^{-1}, G^{-1})$ and denoting

$$Y = G^{-1} Q G^{-T}, \quad R_1 = K_p F \text{ and } R_2 = K_d F, \text{ the inequality (6) follows. This completes the proof of theorem.}$$

B. Extension to Robust Stabilization

The result of the previous section can be extended to robust stabilization for uncertain descriptor systems with polytopic coefficient matrices.

Lets us consider the following linear uncertain descriptor system:

$$E(\theta)\dot{x}(t) = A(\beta)x(t) + B(\zeta)u(t) \quad (7)$$

Where $x \in \mathbb{R}^n$ is the state vector, we assume that E, A and B are constant and respectively belong to the classes:

$$E \in \mathcal{E} = \left\{ E(\theta) : E(\theta) = \sum_{i=1}^{N_E} \theta_i E_i, \sum_{i=1}^{N_E} \alpha_i = 1, \alpha_i \geq 0 \right\}$$

$$A \in \mathcal{A} = \left\{ A(\beta) : A(\beta) = \sum_{j=1}^{N_A} \beta_j A_j, \sum_{j=1}^{N_A} \beta_j = 1, \beta_j \geq 0 \right\}$$

$$B \in \mathcal{B} = \left\{ B(\zeta) : B(\zeta) = \sum_{k=1}^{N_k} \zeta_k B_k, \sum_{k=1}^{N_k} \zeta_k = 1, \zeta_k \geq 0 \right\}$$

Theorem2: the following statements are equivalent:

i) System (7) is SD-stabilizable.

ii) There exist a positive definite matrix Y and matrices F, R_1 and R_2 of appropriate dimensions such that:

Fig.1 System state trajectories.

$$\begin{bmatrix} F^T A_i^T + A_i F + B_j R_1 + R_1^T B_j^T & Y_{i,j,k} + F^T A_i^T + R_1^T B_j^T - E_k F - B_j R_2 \\ * & -F^T E_k^T - E_k F - B_j R_2 - R_2^T B_j^T \end{bmatrix} < 0 \quad (8)$$

$$i = 1 \dots N_E, \quad j = 1 \dots N_A, \quad k = 1 \dots N_B$$

The gain given by: $K_p = R_1 F^{-1}$ and $K_d = R_2 F^{-1}$ solves problem.

Proof: The proof follows by simple convexity arguments. Notes that $\sum_{i=1}^{N_A} \sum_{j=1}^{N_B} \sum_{k=1}^{N_E} \beta_i \theta_j \zeta_k Y_{i,j,k}$ is a Lyapunov function for the closed-loop system.

IV. NUMERICAL ILLUSTRATION

To demonstrate the effectiveness and applicability of the proposed method of the stabilization, we provide the following two example, the first concerned a nominal system and the second introduced the uncertainties.

A. Example-1


We consider a nominal linear descriptor system with parameters as follows:

$$E = \begin{bmatrix} 0 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}, \quad A = \begin{bmatrix} -1 & 4.5 & -0.5 \\ -7 & 7 & -8 \\ -5 & 3 & -6 \end{bmatrix}, \quad B = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 1 \\ 1 & 0 & -1 \end{bmatrix}.$$

We use the MATLAB Control Toolbox to solve the LMI in (6), we obtain the parameters of controller as follows:

$$K_p = \begin{bmatrix} -85.5927 & 7.2735 & -144.9593 \\ 0.7641 & 10.4851 & 9.4792 \\ -15.6521 & 56.5848 & 1.3652 \end{bmatrix}, \quad K_d = \begin{bmatrix} 87.6802 & -8.9111 & 147.8536 \\ -4.4103 & -3.1549 & -11.6439 \\ 19.1912 & -61.0209 & 3.1189 \end{bmatrix}$$

The following figures illustrate the time behavior of states of the nominal descriptor system, with an initial value of the state: $x(t) = [1 \ 0 \ -1]^T$. This justifies the effectiveness of proposed approach considering the stability criteria.

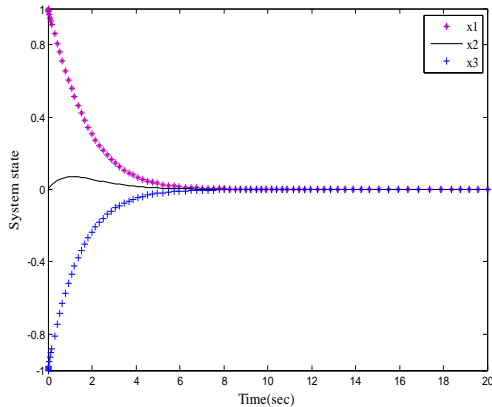

B. Example-2

We consider the vertices of the polytopique, are given by triple:

$$(E_k, A_i, B_j) = \left\{ \begin{array}{l} (E_1, A_1, B_1), (E_1, A_1, B_2), (E_1, A_2, B_1), (E_1, A_2, B_2) \\ (E_2, A_1, B_1), (E_2, A_1, B_2), (E_2, A_2, B_2), (E_2, A_2, B_1) \end{array} \right\}$$

where:

$$E_1 = \begin{bmatrix} 0 & 0 & 2 & 0 \\ 0 & 1 & 0 & 0 \\ -1 & 0 & 0.8 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}, \quad E_2 = \begin{bmatrix} 0 & 0 & 2 & 0 \\ 0 & 1 & 0 & 0 \\ -1 & 0 & 0.8 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

$$A_1 = \begin{bmatrix} 5.4 & 0 & 0 & 0 \\ 0 & 4 & 0 & 0 \\ -1 & 0 & 3 & 0 \\ 0 & 1 & 0 & -2 \end{bmatrix}, \quad A_2 = \begin{bmatrix} 6.4 & 0 & 0 & 0 \\ 0 & 4 & 0 & 0 \\ -1 & 0 & 3 & 0 \\ 0 & 1 & 0 & -2 \end{bmatrix}$$

$$B_1 = \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & 0 \\ 0 & 1 \end{bmatrix}, \quad B_2 = \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & 1 \\ 0 & 1 \end{bmatrix}$$

The resolution of this example shows a feasible solution was the following:

$$K_d = \begin{bmatrix} -0.5382 & -0.2097 & -1.6410 & 0.1193 \\ 0.5539 & 0.1726 & 0.5413 & -0.3149 \end{bmatrix}, \quad K_p = \begin{bmatrix} 8.9776 & -2.2254 & 2.4211 & 0.6274 \\ -1.6532 & 9.73013 & 2.5013 & -3.2269 \end{bmatrix}$$

V. CONCLUSION

The present paper provided a necessary and sufficient condition for the existence of proportional plus derivative feedback controllers for descriptor systems. It represented an LMI based approach to the design of PD state feedback controller. This result is extended for a robust stabilization problem. A numerical example have shown the effectiveness of the proposed approaches considering the stability criteria.

REFERENCES

- [1] Benoît MARX, "Contribution à la Commande et au Diagnostic des Systèmes Algèbro-Différentiel Linéaires", thesis, 16 Décembre, 2003.
- [2] L. Dai, "Singular Control Systems", Lecture Notes in Control and Information Sciences, vol. 118, Springer, Berlin, 1989.
- [3] S. Xu and J. Lam, "Robust Control and Filtering of Singular Systems", Springer, 2006.
- [4] J.Y; Ishiharand M.H.Terra, "Impulse Controllability and Observability of Rectangular Descriptor Systems", IEEE, Vol.46, No.6, June 2001.
- [5] M.Chaabane, O.Bachelier, M. Souissi, D.Mehdi, "Stability and Stabilization of Continuous Descriptor Systems: an LMI Approach", 24 January 2006.
- [6] C.Yang, Q.Zhang and L.Zhou, "Practical Stabilization and Controllability of Descriptor Systems", International Journal of Informaton and Systems Sciences, Volume 1, pages. 455-465.
- [7] S.Ibrir, "LMI Approach to Regularization and Stabilization of Linear Singular Systems: The Discrete-time Case", Word Academy of Science, 2009.

[8] O. Rejichi, et al., "Admissibility and State Feedback Admissibilization of Discrete Singular Systems: An LMI Approach." 16th Mediterranean Conference on Control and Automation Congress Centre, Ajaccio, France, June 25-27, 2008.

[9] B. Sari, O. Bachelier and D. Mehdi "Robust state feedback admissibilization of discrete linear polytopic descriptor systems: a strict linear matrix inequality approach", IET Control Theory and applications, Vol. 6,

[10] F.A. Faria, and al., "Robust state-derivative Feedback LMI-based for Linear Descriptor systems", Hindawi Publishing Corporation, 20 August 2009.

[11] S.Xu et al., "Robust Stability and Stabilization for Singular Systems with State Delay and Parameter Uncertainty", Departement of Mechanical Engineering, University of Hong kong.

[12] S.Xu and J.Lam, "Robust Stability and Stabilization of Descriptor Singular Systems: An Equivalent Characterization", IEEE. Vol 49, April 2004.

[13] M. Chaabane, F. Tadeo, D. Mehdi, and M. Souissi, "Robust Admissibilization of Descriptor Systems by Static Output-Feedback: An LMI Approach", Hindawi Publishing Corporation, Article ID 960981, 10 pages, 10 March 2011